




Lawn edging / Edging restraint



PRODUCT BROCHURE

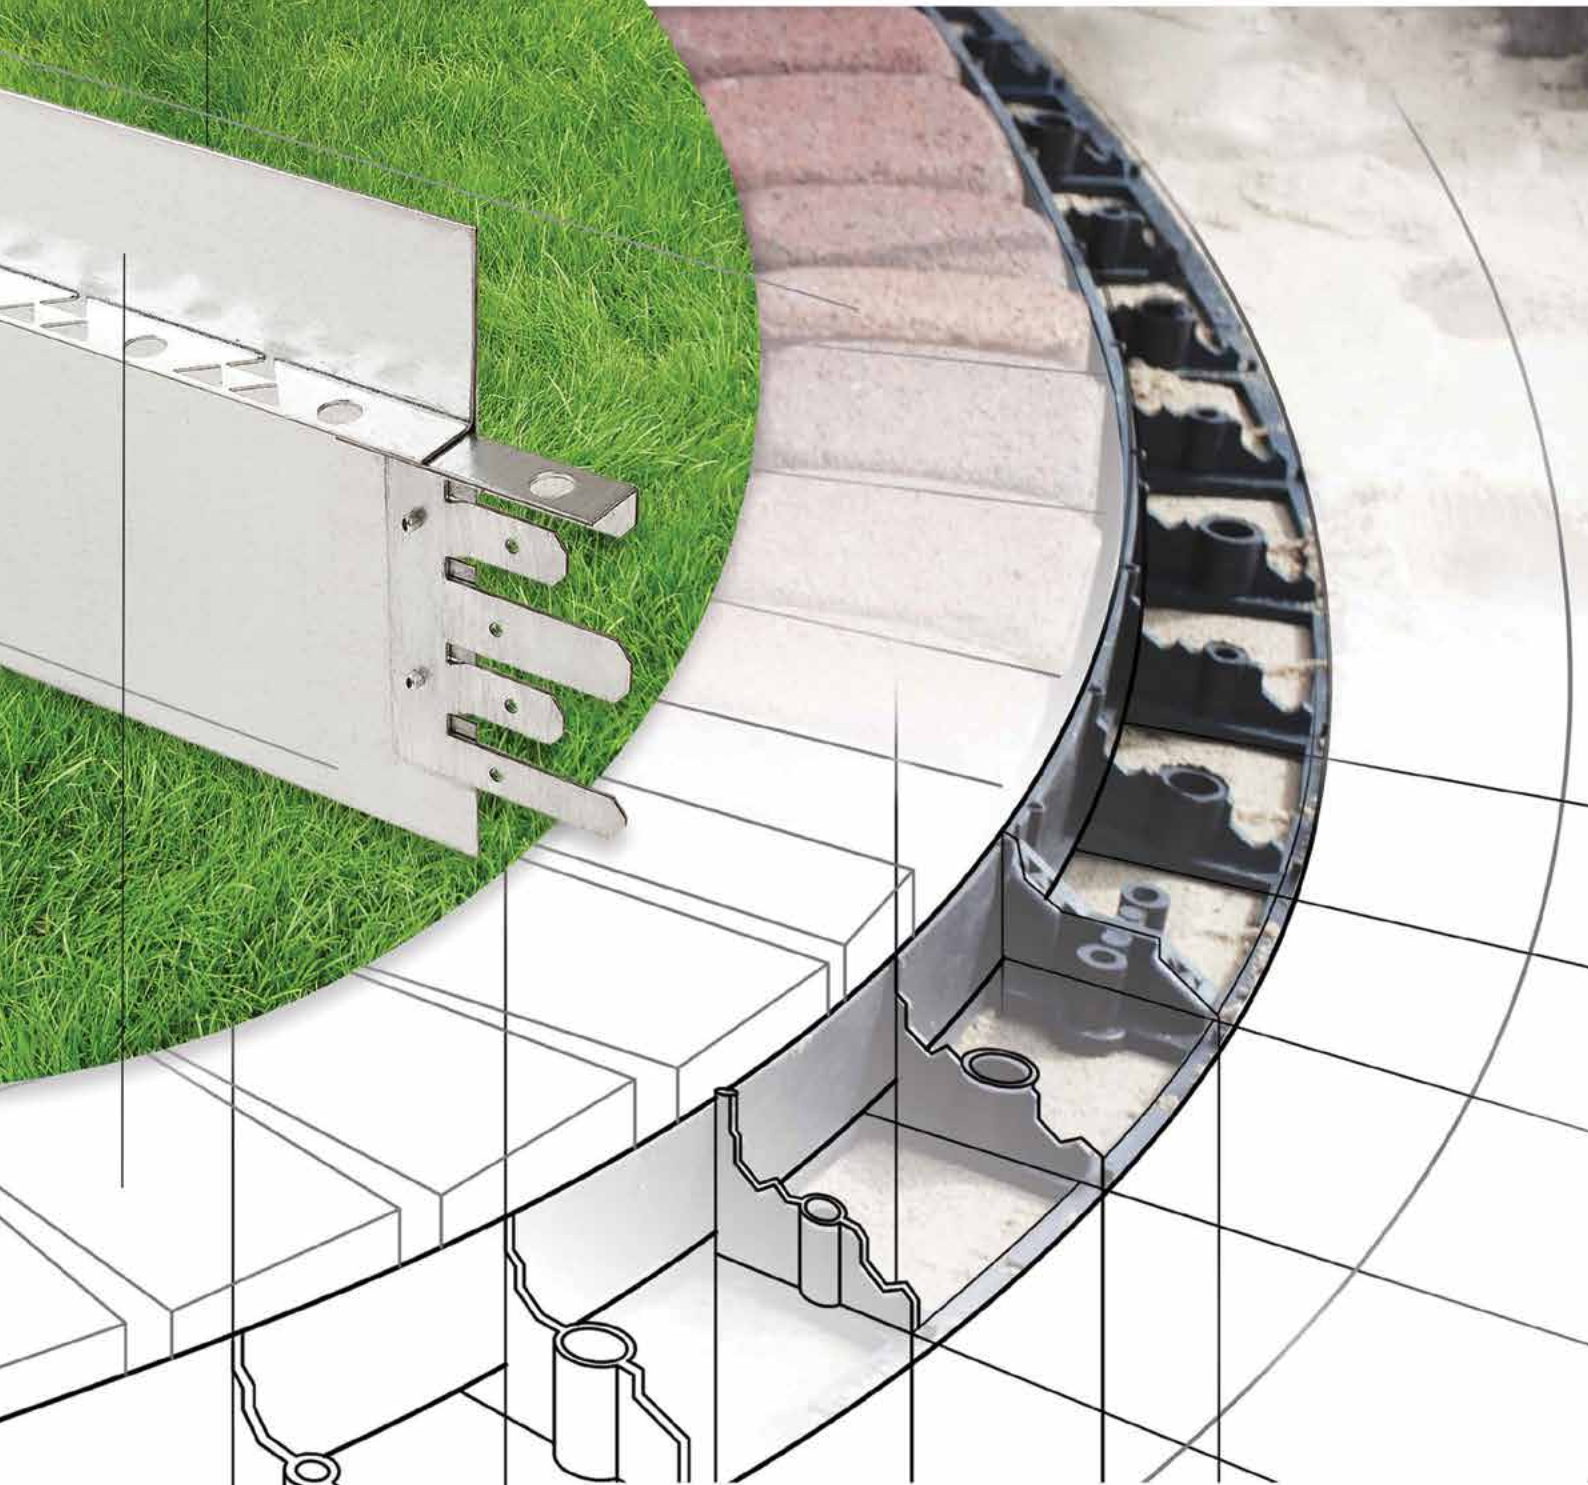

The **ArchiGreen® LE 175** lawn edging metal profiles are installed by professional gardeners to provide an aesthetic and permanent solution in establishing neat demarcations between the various media and aggregates present in the garden. Due to its bendable feature, this product is an excellent choice where curves are common in pathways and borders.



	Height	Width	Length	Weight
LE 175	175 mm	20 mm	2000 mm	2.21 kg/m

The metal profiles are available in galvanised and stainless steel. Material thickness of the galvanised steel plate is 1 mm which is bent back on top to blunt the upper edge of the profile to 2 mm. Vehicles are prohibited to cross the lawn edging profiles.

For further technical data visit [www.archigreenltd.com](http://www.archigreenltd.com)

## Installation of the ArchiGreen® LE 175


Following the appropriate preparation of the soil, the demarcation line where the edging product needs to be installed is marked with a string; then, using a spade, a narrow rift is dug along the track set by the string to fit the LE 175 metal profiles to their desired depth (130 to 150 mm deep, so that the upper edge of the product is either flush with the lawn or max. 20 mm above the ground). The profiles are abutted via the metal connectors at the ends and installed upright in the rift. With the aid of a snips tool the triangular perforations along the stiffening flange can be easily clipped off to form curves or even right angles from the profiles. A rubber-headed mallet is used for fine positional adjustments of the profiles which are then fixed in place using anchoring nails of size Ø8 x 300 mm. This fixing method needs 2 anchoring nails / profile when forming straight demarcations whereas 3 to 5 nails / profile are required when forming curves.

### Benefits of the LE 175 and the PER-P:

- Simple border edging.
- Quick easy installation.
- Professional, unobtrusive finish.
- Lightweight
- Easily edges corners and curves. Easily cut to size.
- Helps secure pavers and prevents them from moving horizontally.
- Can be installed before or after the pavers have been installed.



The **ArchiGreen® PER-P** is a quick and simple paving restraint system. It provides an aesthetically appealing finish to almost any application, including block pavements, garden paths or gravel strips. The 100 mm depth paver edge restraint is also suitable to fulfil the role of ballast edge trims on extensive green roofs.

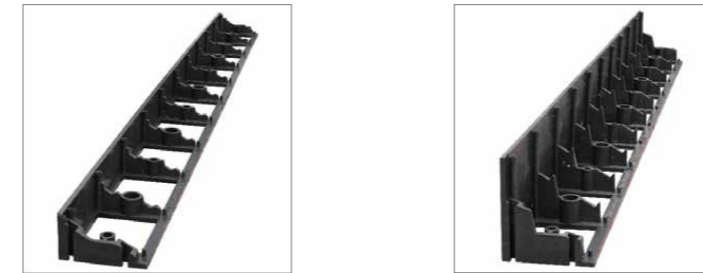

	Height	Width	Length	Weight
PER-P 45	45 mm	80 mm	1200 mm	0.54 kg
PER-P 78	78 mm	80 mm	1000 mm	0.65 kg
PER-P 100	100 mm	85 mm	1000 mm	0.75 kg

PER-P is made from UV & frost resistant recycled polyethylene. It is resistant to various acids that can be found in the soil. The wall thickness of the restraint profile is 4 mm.

For further information visit [www.archigreenltd.com](http://www.archigreenltd.com)



## Installation of the PER-P restraint

The paver edge restraint profiles (PER-P) are abutted via the connectors located at the end of each profile. Following the appropriate preparation of the foundation, these abutted profiles or borders are then fixed in place using anchoring spikes (dia.16x250 mm) made of plastic that can be additionally ordered. With the aid of a snips tool the stiffening flange can be easily cut to form curves quickly. The plastic borders are suitable to retain the edges of various pavers on terraces and patios. In the case of establishing linear retention schemes (i.e. forming straight lines) the number of anchoring spikes required to fix each plastic restraint profile is 3 whereas in the case of forming retention curves the number of anchoring nails increases to 4 - 5 nails per restraint. Once installed, the edge restraints are covered and the demarcation line between turf and other types of ballast is virtually invisible. Vehicles are prohibited to cross the paver edge restraints unless installed at least 2 cm the pavers' level.







Manufacturer:

**ARCHIGREEN Zöldtető Kft.**

Mobil: 06 70 2 999 383 • Tel./Fax: 06 96 831 605

E-mail: [info@archigreen.hu](mailto:info@archigreen.hu) • [www.archigreen.hu](http://www.archigreen.hu)

Distributor:

Disclaimer:

ArchiGreen® Lawn edging / Edging restraint Product brochure  
no.: GB FK 2018-07-02

© All rights reserved. ArchiGreen® and SedumDrain® are registered trademarks. All images and text are under copyright and no part of this publication may be reproduced, stored in a retrieval system or transmitted in any form or by any means, electronic, photocopying or otherwise, without the prior written permission of ARCHIGREEN Zöldtető Ltd (hereinafter: The Company). All reasonable care has been taken to ensure that all information is current at the time of print. However, The Company pursues a policy of constant product development and information contained herein is therefore subject to change without notice. Moreover, all information, recommendations and guidance notes on the use of the products are made without warranty since the conditions of use are beyond the control of The Company. The customer is responsible for ensuring that each product is fit for its intended purpose and that conditions for use are suitable. For specific projects please contact your regional / country ArchiGreen Distributor whose contact details can be found at: [www.archigreenltd.com](http://www.archigreenltd.com)

